

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



OTTAWA HULL KIA 0G9

(11) (C) **2,060,131**

(22) 1992/01/28

(43) 1993/07/29

(45) 1995/06/27

BREVETS

MARQUES
DE COMMERCE

DROITS
D'AUTEUR

DESSINS
INDUSTRIELS

TOPOGRAPHIES
DE CIRCUITS
INTÉGRÉS

PATENTS

TRADE-MARKS

COPYRIGHT

INDUSTRIAL
DESIGN

INTEGRATED
CIRCUIT
TOPOGRAPHY

(51) Intl.Cl. ⁶ H01R 13/639; H01R 13/46; H01M 2/10

(19) (CA) **CANADIAN PATENT** (12)

(54) Battery Socket for Smoke Detector

(72) Mallory, John , Canada

(73) Dicon Safety Products International Inc. , Barbados

(57) 13 Claims



27 JUIN 1995

ABSTRACT

2060131

5 A battery housing comprising a main body portion, a socket in the main body portion shaped to receive a battery, contacts disposed at one end of the socket adapted to connect with correspondingly disposed electrodes on the battery, and a lid adapted to open and close over the socket, the lid including means for urging the battery electrodes into close connection with the contacts.

BATTERY SOCKET FOR SMOKE DETECTORField of the Invention

The present invention relates in general to battery enclosures, and more particularly to a battery housing or enclosure accommodating a lid for urging the battery into
5 close-fitting connection with corresponding electrodes within the housing.

Background of the Invention

Housings are well known in the field of fire and smoke alarms, burglar alarms etc., for housing electronic circuitry including batteries for providing operating
10 power to such circuitry. For example, one well known ceiling mounted smoke detector incorporates resilient battery clips forming part of a printed circuit board for receiving a nine volt transistor-type battery. The
15 printed circuit board is secured to the ceiling and a plastic enclosure is provided for connection to the printed circuit board forming a protective and decorative cover. In order to install or replace a battery using
20 this prior art arrangement, the user first removes the plastic cover, and then must pry the spent battery loose from the resilient clips. The replacement battery is then installed and the plastic cover replaced thereover.

It has been found that this battery installation or replacement procedure for prior arrangements can often be
25 extremely awkward, and can potentially lead to accidental falls from step ladders, etc. Specifically, since the installation procedure requires the user to simultaneously hold the removed plastic cover and one of
30 either the spent or charged battery while manipulating the other battery relative to the resilient fingers, abundant opportunities are provided for accidental falls. These opportunities are further enhanced in circumstances where the fire alarm has been accidentally activated due
35 to unintentionally generated smoke within the house (e.g. burnt toast, etc.), in which case the user often finds himself or herself frantically attempting to remove the



battery from the unit in the midst of a sonic barrage in the form of high volume and high pitch alarm signals.

As an alternative, the user may execute the de-
5 installation or replacement of batteries in multiple steps (e.g. ascending and descending the step ladder three times in succession for removing the plastic cover, replacing or removing the batter, and finally replacing the plastic batter cover). However, human nature being
10 what it is, many user's are apt to forego the cautious and more time consuming procedure in favour of the first discussed quicker and more dangerous installation procedure.

Summary of the Invention

15 According to the present invention, an electronic circuit housing is provided for use with smoke and fire alarms, etc., wherein battery removal or replacement can be effected easily and safely. In particular, according to the invention, batter replacement can be effected
20 without the user being required to juggle multiple components simultaneously or fumble with awkward battery receiving clips, etc.

In general, according to various aspects of the present invention there is provided: a battery housing,
25 comprising a main body portion, a socket in said main body portion shaped to receive a battery, contacts disposed at one end of said socket for connection to corresponding disposed electrodes on said battery, and a lid positioned to open and close over said socket, said
30 lid including means for urging said battery electrodes into connection with said contacts, said means for urging comprising a latch for insertion into said socket at an end thereof opposite said contacts, said latch having an inward bend for forcing said battery toward said opposite
35 end upon closing said lid, whereby said electrodes are urged into close connection with said contacts, and further including a resilient tab projecting from said lid at an acute angle thereto for forcing said battery into said socket upon closing said lid.

2060131

2a

Brief Description of the Drawings

Figures 1 and 2 are perspective views showing the bottom of a batter housing according to the preferred embodiment with a lid for the battery socket shown in the open position; and

Figure 3 is a plan view of the battery housing with the lid in the closed position;

Figure 3 is a cross-sectional view through the centre of the battery socket shown in Figures 1 and 2.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Turning to the Figures, a battery housing 1 is shown comprising a main body portion 3, a rectangular socket 5 in the main body portion adapted to receive a battery 7. The main body portion 3 of the battery housing 1 may be used to accommodate smoke alarm circuitry, intrusion alarm circuitry, etc. Contacts 9 are disposed at one end of the socket 5 for connection with correspondingly disposed electrodes 11 on the battery 7. The socket 5 is dimensioned with rectangular slots for receiving the electrodes 11 of the battery. Moreover, the rectangular slots are differently sized so as to prevent insertion of the battery into socket 5 with reverse polarity.

A lid 13 is adapted to open and close over the socket 5. The lid is pivoted to the bottom surface of the main body portion 3, and includes an aperture 15 through which a screw or bolt may be inserted for securing the battery housing to the ceiling via the lid 13. The main body portion 3 is provided with a recessed area 17 conforming to the shape of the lid 13 such that, when the battery housing is installed on a ceiling and the lid is closed, the bottom surface of the battery housing will be flush with the ceiling surface.

The lid 13 includes a latch 19 adapted to be inserted into the socket 5 at an end thereof opposite the contacts 9. The latch 19 has an inward bend culminating in an apex 21 for forcing the battery 7 away from the latch 19 upon closing the lid 13, whereby the electrodes 11 are urged into close connection with the contacts 9. The latch 19 also includes a tooth or catch 23 adapted to be received within a cavity 25 of the socket 5 such that one face of the catch 23 engages with an adjacent surface 27 of cavity 25 thereby securing the lid 13 in closed position via latch 19. However, such closure may be

effected only when the battery 7 is disposed within the socket 5. In particular, the battery 7 must be in place to provide pressure against the apex 21 for pushing the catch 23 into engagement with cavity 25. This feature is
5 provided as a safety measure to provide a visual indication (i.e. the open lid 13) in the event of a missing battery.

Lid 13 further comprises a resilient tab 29 projecting from the lid at an acute angle thereto for
10 forcing the battery 7 into the socket 5 upon closing the lid 13 (shown best with reference to Figure 3).

In normal operation, battery housing 1 is secured to a ceiling via a screw or bolt (not shown) passing through aperture 15 of lid 13. As discussed above, with the lid
15 13 in the closed position the bottom surface of the main body portion 3 is flush with the ceiling. The lid 13 remains in the closed position as a result of the tooth or catch 23 of latch 19 engaging surface 27 of cavity 25 in the socket 5. The resilient tab urges battery 7 into
20 the socket 5, while the apex 21 of latch 19 urges the battery contacts 11 into close connection with the electrode contacts 9 of the battery housing while simultaneously urging the catch 23 into engagement with the cavity 25.

Battery replacement is accomplished by simply pulling downwardly on the main body portion 3 such that latch 19 disengages from cavity 25. Since the main body portion 3 is pivotally connected to lid 13, the main body portion 3 rotates downwardly under gravitational force.
30 Furthermore, since battery 7 is no longer retained within socket 5 by means of resilient tab 29 and latch 19, when in the lid is rotated to the open position, battery 7 can be easily pulled out of the socket 5 or allowed to fall out under gravitational force. Similarly, a replacement
35 battery can be inserted in socket 5 and held in place while the main body portion 3 is pivoted upwardly such that latch 19 re-engages the cavity 25 thereby forcing

the replaced battery 7 into close contact with the electrode contacts 9.

As discussed above, the ease with which batteries may be installed, removed or replaced according to the present invention constitutes a significant improvement over prior art systems.

Furthermore, in the event that the circuitry within the battery housing 1 requires servicing, the entire unit may be easily replaced by simply unscrewing the single screw or bolt (not shown) which passes through aperture 15. According to prior art devices, in order to remove the battery housing from the ceiling a user is typically required to first remove the outer cover, pry loose the battery to avoid inadvertent alarm generation, and then remove multiple screws for freeing the circuitry from the ceiling.

Other embodiments and variations of the present invention are possible. For example, whereas the preferred embodiment discusses an application to fire or smoke alarm detection systems, the principles of the invention may be applied to virtually any battery-operated electronic device. Although the preferred embodiment illustrates a nine volt transistor-type battery, the principles of the invention may be applied to virtually any voltage and/or size of battery used to power electronic devices (e.g. AA, C, or D-type batteries, etc.). All such modifications are believed to be within the sphere and scope of the invention as defined by the claims appended hereto.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OF PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A battery housing, comprising a main body portion, a
5 socket in said main body portion shaped to receive a
battery, contacts disposed at one end of said socket for
connection to corresponding disposed electrodes on said
battery, and a lid positioned to open and close over said
10 socket, said lid including means for urging said battery
electrodes into connection with said contacts, said means
for urging comprising a latch for insertion into said
socket at an end thereof opposite said contacts, said
latch having an inward bend for forcing said battery
15 toward said opposite end upon closing said lid, whereby
said electrodes are urged into close connection with said
contacts, and further including a resilient tab
projecting from said lid at an acute angle thereto for
forcing said battery into said socket upon closing said
lid.

20

2. A battery housing of claim 1 wherein said lid
is pivotally connected to said main body portion.

3. The battery housing of claim 1 wherein said lid
25 includes an aperture for mounting said housing to a
screw.

4. The battery housing of claim 1 wherein said
main body portion is dimensioned to contain smoke alarm
30 circuitry.

5. The battery housing of claim 1 wherein said
main body portion is indented to receive said lid in
closed position such that said lid and main body portion
35 form a flat surface.

6. The battery housing of claim 1 wherein said
socket conforms generally to a rectangular parallelepiped
in shape.

7. The battery housing of claim 1 wherein said socket includes a cavity for receiving said latch, said latch being urged into connection with said cavity due to said inward bend being displaced by said battery.

5

8. The battery housing of claim 7 wherein said latch includes a tooth portion extending from a distal end thereof.

10 9. The battery housing of claim 8 wherein said cavity is bounded on one side by a surface against which said tooth portion rests for securing said lip upon closure thereof.

15 10. The battery housing of claim 1 further including a pair of differently sized rectangular slots in said socket for aligning said electrodes of the battery with like polarity ones of said contacts.

20 11. A battery housing, comprising a main body portion, a socket in said main body portion shaped to receive a battery, contacts disposed at one end of said socket for connection to correspondingly disposed electrodes on said battery, and a lid positioned to open and close over said
25 socket, said lid including means for urging said battery electrodes into connection with said contacts, said lid including an aperture for mounting said housing to a screw.

30 12. A battery housing, comprising a main body portion, a socket in said main body portion shaped to receive a battery, contacts disposed at one end of said socket for connection to correspondingly disposed electrodes on said battery, and a lid positioned to open and close over said
35 socket, said lid including means for urging said battery electrodes into connection with said contacts, said means for urging comprising a latch adapted to be inserted into

said socket at an end thereof opposite said contacts,
said latch having an inward bend for forcing said battery
toward said opposite end upon closing said lid, whereby
said electrodes are urged into close connection with said
5 contacts, said latch being urged into connection with
said cavity due to said inward bend being displaced by
said battery.

13. A battery housing, comprising a main body portion, a
10 socket in said main body portion shaped to receive a
battery, contacts disposed at one end of said socket for
connection to correspondingly disposed electrodes on said
battery, a lid positioned to open and close over said
socket, said lid including means for urging said battery
15 electrodes into connection with said contacts, and
further including a pair of differently sized rectangular
slots in said socket for aligning said electrodes of the
battery with like polarity ones of said contacts.



✓

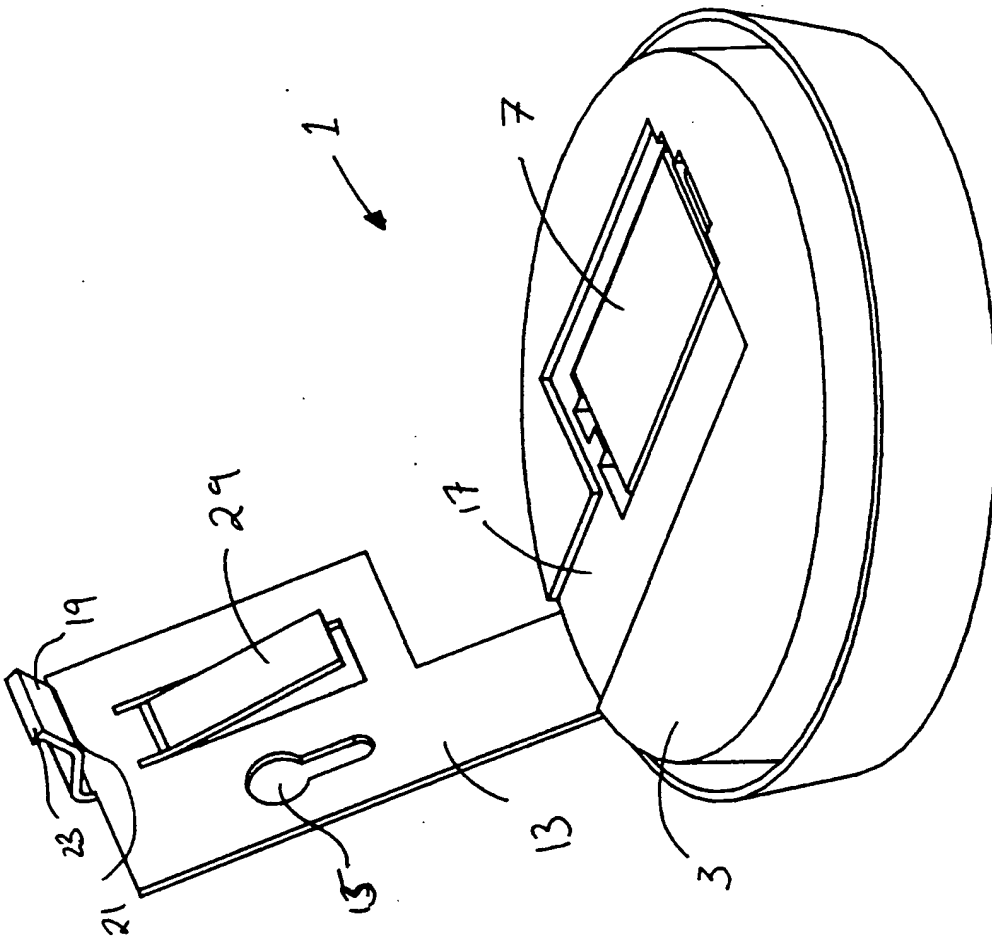


Fig 1

Signed: M. L. Lunn


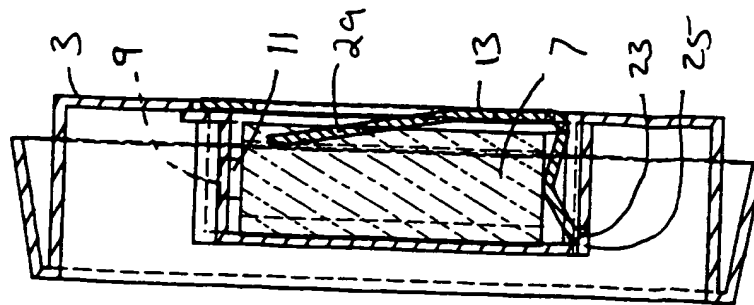


Fig 3

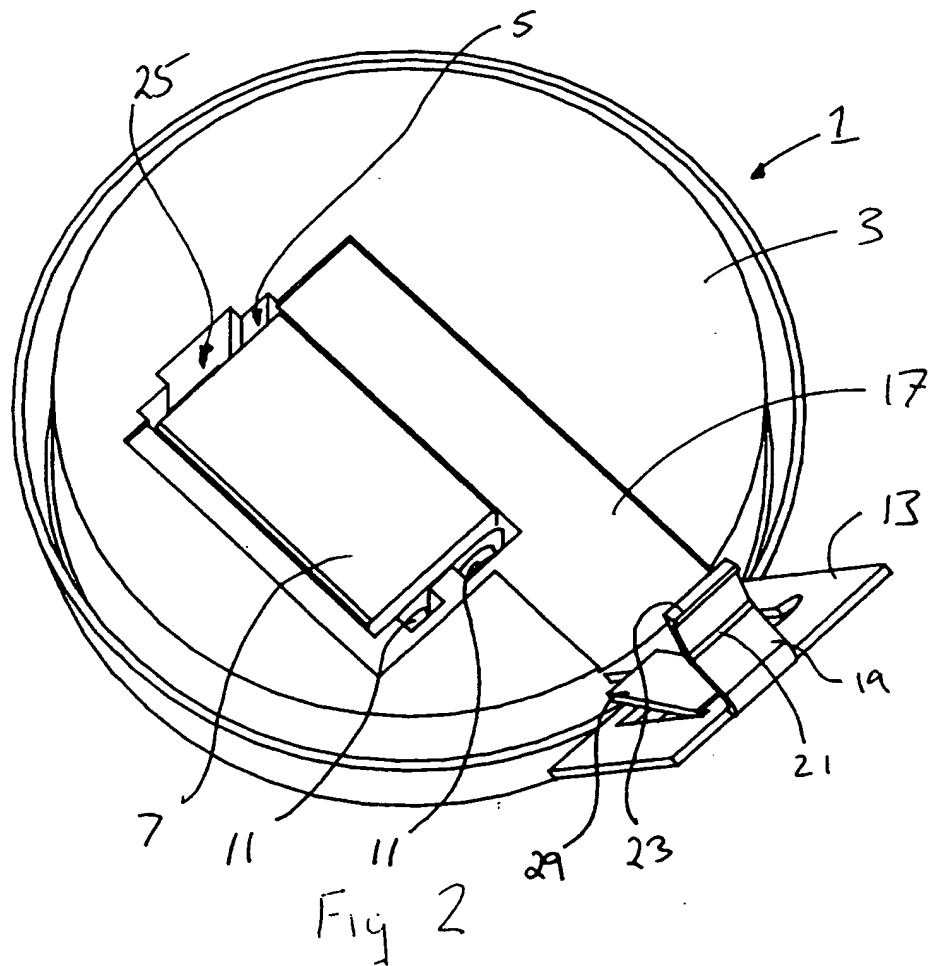

Signed: M. Bureau